

SRP-350plusV

3-inch Thermal POS Printer



Retail



Restaurants
& Bars




Lottery



Hypermarket

Industry Leading Printing Solution

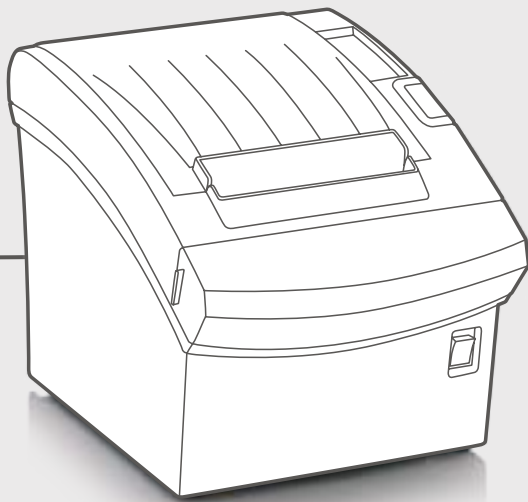

400
mm/sec



High-Quality Printing Performance

- Fast printing up to 400 mm/sec
- 16-shade grey scale printing of graphics
- Part of the world-class SRP-350 line
- Paper save mode supported



World-Class Flexibility

- Built-in USB and Ethernet
- Optional Serial, Parallel, WLAN, Bluetooth®, and Powered USB
- Compatible with major operating systems including iOS™, Android™, and Windows®
- SoftAP(Captive Portal), Simple Wi-Fi set up to a mobile device

BLUE4EST™

180 dpi 203 dpi



User-Friendly Design

- Seamless switching to Blue4est® Paper, thanks to BIXOLON's Visibility Intelligence™
- Special designed for anti-jam guide
- Optional diverse printer accessories and B-melodist
- 180 dpi, 203 dpi options

SRP-350plusV

3-inch Thermal POS Printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

SRP-350plusV: Up to 400 mm/sec

SRP-352plusV: Up to 370 mm/sec

Print Resolution

SRP-350plusV: 180 dpi

SRP-352plusV: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Paper Near End, Cover Open, Visibility Intelligence Sensor

Media Characteristics

Media Type

Receipt

Media Width

80 mm

Optional 58 mm

Media Roll Diameter

Up to 83 mm

Media Thickness

0.05 ~ 0.08 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)

145 x 200 x 146 mm

(5.70 x 7.87 x 5.74 inch)

Weight

1.6 kg (3.52 lbs.)

Electrical

EnergyStar Certified,

External Power Adaptor 100-240 V AV, 50/60 Hz

Drawer Port

2 ports (Via y-type adaptor)

Performance Characteristics

Memory

64 Mb SDRAM, 64 Mb Flash

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

Standard: USB V2.0 FS + Ethernet

Optional:

① USB V2.0 FS + Ethernet + Serial

② USB V2.0 FS + Ethernet + Dual Serial

③ USB V2.0 FS + Ethernet + Parallel

④ USB V2.0 FS + Ethernet + WLAN¹

⑤ USB V2.0 FS + Ethernet + Bluetooth

⑥ USB V2.0 FS + Ethernet + Powered USB

WLAN: 802.11a/b/g/n

(Infrastructure, Ad-hoc, Wi-Fi Direct, SoftAP)

WEP40/104, WPA1/2 (PSK, EAP)

Environment Characteristics

Temperature

Operating: 0 ~ 40 °C (32 ~ 104 °F)

Storage: -20 ~ 60 °C (-4 ~ 140 °F)

Humidity

Operating: 10 ~ 80 % RH

Storage: 10 ~ 90 % RH

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver

OPOS/JPOS Driver

Linux/Mac CUPS Driver

Virtual COM USB/Ethernet Driver

Utility Program

Network Auto Installer

SDK / Plugin

Android/iOS/Windows SDK

Linux SDK

Xamarin SDK

Web Print SDK

Cordova Plugin

Application

mPrint App (Android, iOS)

MDM (Optional)

BIXOLON Profile Manager

- XPM™, XCM™ (Windows, Android)

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24, Font B: 9 x 17, Font C: 9 x 24,

KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-350plusV: Font A: 42, Font B, C: 56,

KOR, CHN, JPN: 21

SRP-352plusV: Font A: 48 Font B, C: 64

KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95

Extended Graphics: 128 x 35 page

International: 32

Graphics

Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbologies

1D: Coda Bar, Code 39, Code 93, Code 128,

EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR code

Accessories

Standard

RJ12 6pin cable Adapter (Male to Female),

USB A-B Cable 1.8 m

Optional

Built-in SMPS, Vertical stand, Wall mount,

Splash Proof Cover, External buzzer, B-Melodist,

Powered USB (0.5/1.2 m),

Serial Cable (9-9/25-9 pin), Parallel Cable



BR_SRP-350plusV_EN_MAR23_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON

www.BIXOLON.com

BIXOLON Co.,Ltd.

+82 31 218 5500

sales@bixolon.com

BIXOLON America Inc.

+1 858 764 4580

sales@bixolonusa.com

BIXOLON Mexico

+521 55 8852 7880

marcelo@bixolonusa.com

BIXOLON Europe GmbH

+49 211 68 78 54 0

sales@bixolon.de

BIXOLON MEA

+971 4 222 6480

russell@bixolon.com